

TIG 17

- Type of cooling: Air Cooled
- Rating: 140A DC
100A AC
- Duty cycle: 35%
- Tungsten electrodes: Ø0.5-4.0mm



TIG 17 & TIG 17V Rigid

TIG 17 & TIG 17V Flex

TIG 17 Finger Control

● TIG 17 & TIG 17V Rigid

Head Style	Cable	Cable Length	Standard
Rigid	1 Piece	4m	TIG 17-4-R RG
		8m	TIG 17-8-R RG
	2 Piece	4m	TIG 17-4-2 RG
		8m	TIG 17-8-2 RG
Rigid + Valve	1 Piece	4m	TIG 17V-4-R RG
		8m	TIG 17V-8-R RG
	2 Piece	4m	TIG 17V-4-2 RG
		8m	TIG 17V-8-2 RG

● TIG 17 & TIG 17V Flex

Head Style	Cable	Cable Length	Standard
Flex	1 Piece	4m	TIG 17-4-R FX
		8m	TIG 17-8-R FX
	2 Piece	4m	TIG 17-4-2 FX
		8m	TIG 17-8-2 FX
Flex + Valve	1 Piece	4m	TIG 17V-4-R FX
		8m	TIG 17V-8-R FX
	2 Piece	4m	TIG 17V-4-2 FX
		8m	TIG 17V-8-2 FX

● TIG 17 Finger Control

Head Style	Cable	Cable Length	Standard
Finger Control	1 Piece	4m	TIG 17-4-R FC
		8m	TIG 17-8-R FC
	2 Piece	4m	TIG 17-4-2 FC
		8m	TIG 17-8-2 FC

TIG 26

- Type of cooling: Air Cooled
- Rating: 180A DC
130A AC
- Duty cycle: 35%
- Tungsten electrodes: Ø0.5-4.0mm

*Technical data based on cable assembly lengths of up to 8.00m.



● TIG 26 & TIG 26V Rigid

Head Style	Cable	Cable Length	Standard
Rigid	1 Piece	4m	TIG 26-4-R RG
		8m	TIG 26-8-R RG
	2 Piece	4m	TIG 26-4-2 RG
		8m	TIG 26-8-2 RG
Rigid + Valve	1 Piece	4m	TIG 26V-4-R RG
		8m	TIG 26V-8-R RG
	2 Piece	4m	TIG 26V-4-2 RG
		8m	TIG 26V-8-2 RG

● TIG 26 & TIG 26V Flex

Head Style	Cable	Cable Length	Standard
Flex	1 Piece	4m	TIG 26-4-R FX
		8m	TIG 26-8-R FX
	2 Piece	4m	TIG 26-4-2 FX
		8m	TIG 26-8-2 FX
Flex + Valve	1 Piece	4m	TIG 26V-4-R FX
		8m	TIG 26V-8-R FX
	2 Piece	4m	TIG 26V-4-2 FX
		8m	TIG 26V-8-2 FX

● TIG 26 Finger Control

Head Style	Cable	Cable Length	Standard
Finger Control	1 Piece	4m	TIG 26-4-R FC
		8m	TIG 26-8-R FC
	2 Piece	4m	TIG 26-4-2 FC
		8m	TIG 26-8-2 FC

TIG 18

- Type of cooling: Water Cooled
- Rating: 320A DC
230A AC
- Duty cycle: 100%
- Tungsten electrodes: Ø0.5-4.0mm



● TIG 18 & TIG 18V Rigid

Head Style	Cable	Cable Length	Standard
Rigid	3 Piece	4m	TIG 18-4
		8m	TIG 18-8
Rigid + Valve	3 Piece	4m	TIG 18V-4
		8m	TIG 18V-8

● TIG 18 & TIG 18V Flex

Head Style	Cable	Cable Length	Standard
Flex	3 Piece	4m	TIG 18-4 FX
		8m	TIG 18-8 FX
Flex + Valve	3 Piece	4m	TIG 18V-4 FX
		8m	TIG 18V-8 FX

● TIG 18 Finger Control

Head Style	Cable	Cable Length	Standard
Finger Control	3 Piece	4m	TIG 18-4 FC
		8m	TIG 18-8 FC

Cable/Hose Connector



M10*1
C710




M16*1.5 Gas/Water
C717



5/8
C724



M12*1 Water
C711



M16*1.5
C718



M14*1.5
C725



M10*1
C712



C719



100A
C726



M12*1
C713



M12*1
C720



M16 Adaptor M14
C739



M14*1.5
C714



7/8
C721



M14 Adaptor M16
C740



M16*1.5 Water/Gas
C715



9/16
C722



M16 Adaptor M12
C747



M14*1.5
C716



5/8 Water
C723


M12 Adaptor M16
C748

Torch Handle



TIG 17/18/26 Torch Parts

CUP	COLLET BODY	COLLET	HEATSHIELD	TORCH	BACKCAP
-----	-------------	--------	------------	-------	---------

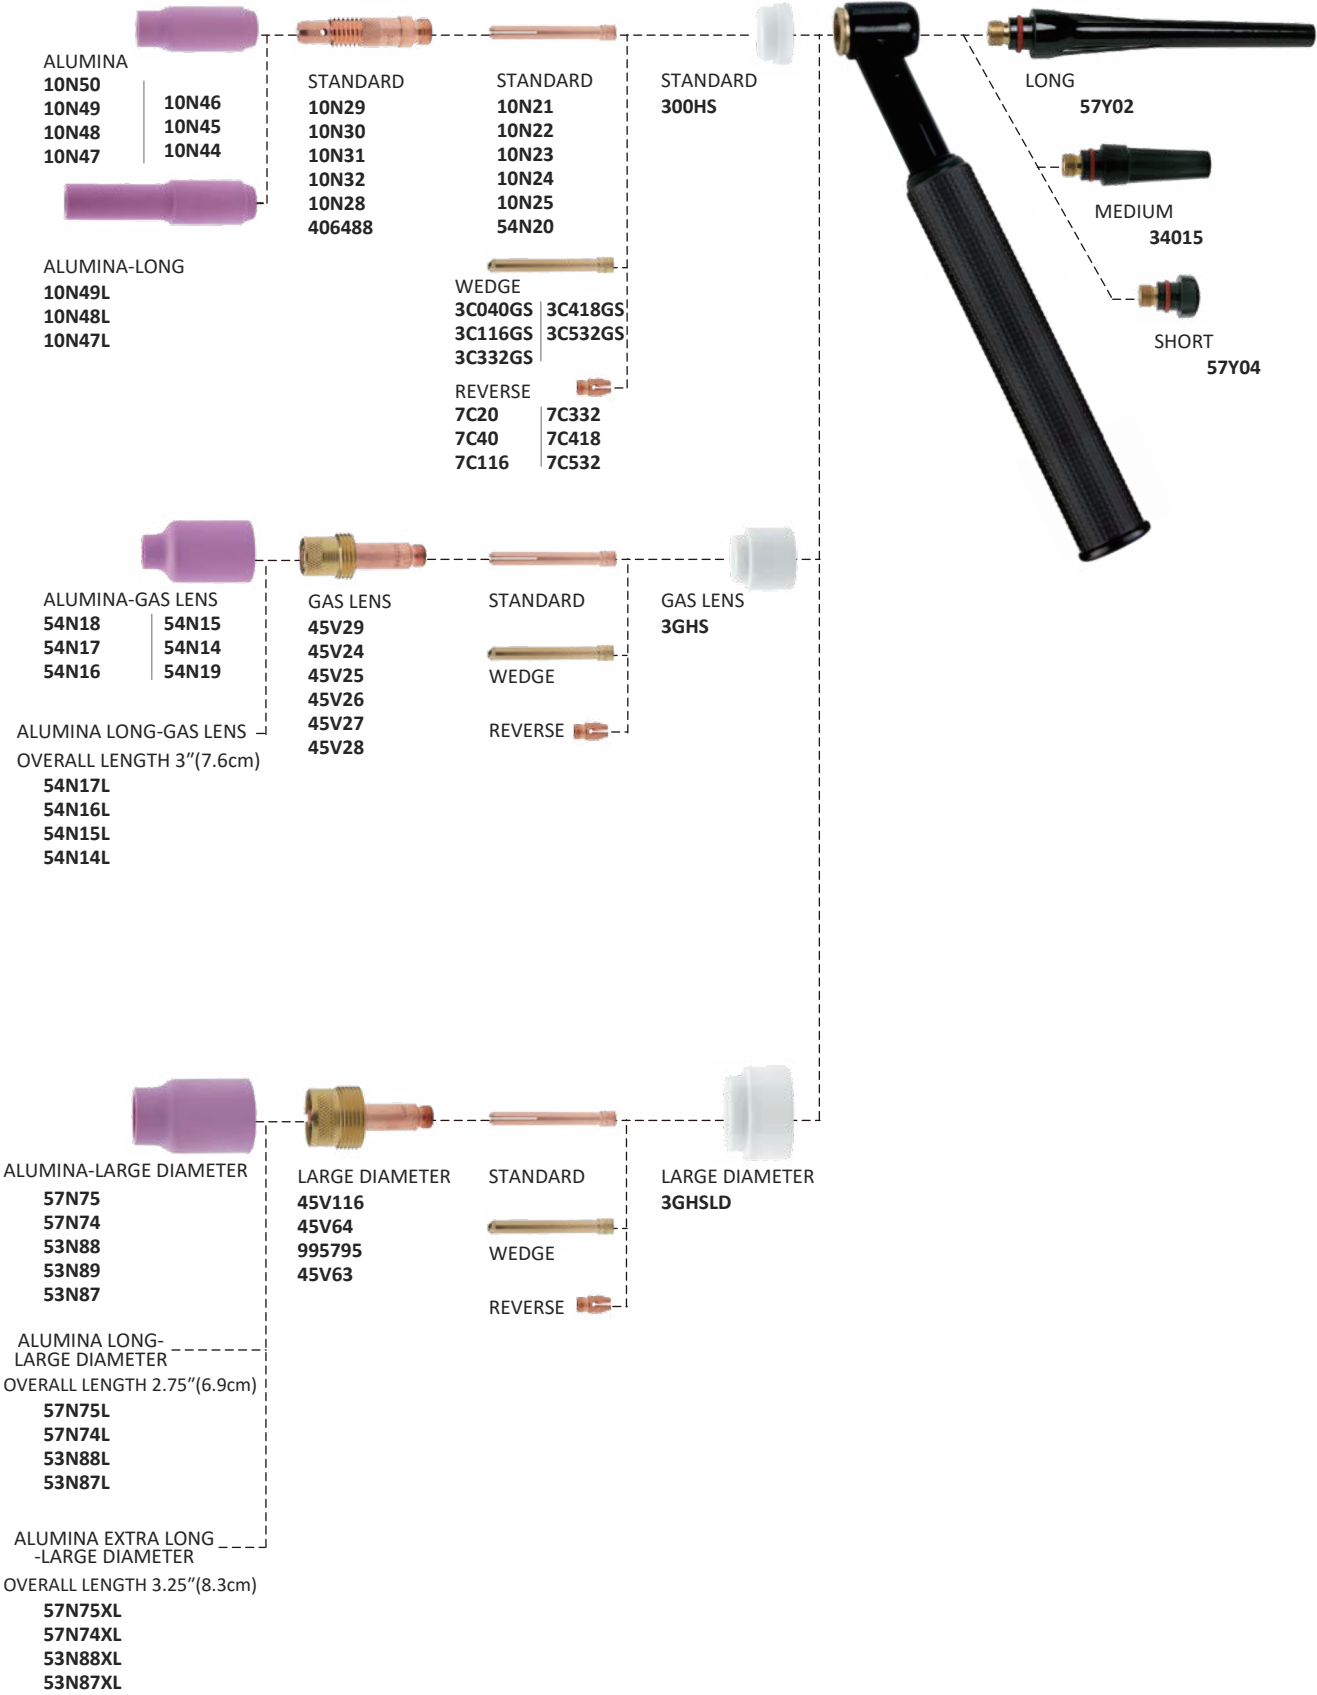

Torch Head



Model	Rating		Cooling
	AC	DC	
TIG 17V	100A	140A	Air cooled
TIG 26V	130A	180A	Air cooled
TIG 18V	230A	320A	Water cooled



Model	Rating		Cooling
	AC	DC	
TIG 17	100A	140A	Air cooled
TIG 26	130A	180A	Air cooled
TIG 18	230A	320A	Water cooled



Model	Rating		Cooling
	AC	DC	
TIG 17 Flex	100A	140A	Air cooled
TIG 26 Flex	130A	180A	Air cooled
TIG 18 Flex	230A	320A	Water cooled