



ARC 141/181



- VRD feature is optional
- Hot Start function for easier arc starting
- Digital Ammeters for easy viewing
- Arc Force makes welding smoothly
- Generator friendly allows to work with diesel generators and avoid failures due to its voltage spikes
- Protections including over-heat, over-voltage, low-voltage and over-current

**Decoration Industrial**

Processes

- STICK(SMAW)
- LIFT TIG
- V.R.D(optional)

Optional Accessories

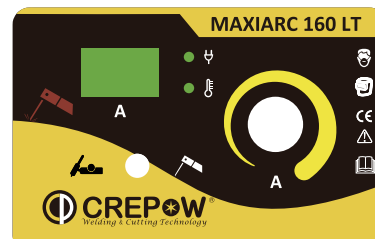
- Earth cable and clamp
- Welding cable and holder
- Carry case #00.0200.02
- WP-17V-4m #50.0008

Model	Input Voltage	Effective Input Amps	KW	Rated Output at 40°C	No-load Volts	Dimension	Net weight	Protection Class
ARC 141 220±15%VAC 50/60Hz	Single phase	9.9	7.5	140A@10%	68	L:300mm(11.8in.) W:120mm(4.7in.) H:210mm(8.2in.)	3.3kg(7.2lb.)	IP21S
ARC 181 220±15%VAC 50/60Hz	Single phase	14.5	10	180A@10%	68	L:300mm(11.8in.) W:120mm(4.7in.) H:210mm(8.2in.)	3.5kg(7.7lb.)	IP21S

MAXIARC 160/200 LT



- Compact and portable with light weight
- Lift Tig is capable
- Hot Start function for easier arc starting
- Arc Force makes welding smoothly
- Digital Ammeters for easy viewing
- High duty cycle for industrial applications
- Generator friendly allows to work with diesel generators and to avoid failures due to its voltage spikes
- Protections including over-heat, over-voltage, low-voltage and over-current

**Semi Industrial**

Processes

- STICK(SMAW)
- LIFT TIG

Optional Accessories

- Earth cable and clamp
- Welding cable and holder
- Carry case #00.0200.02
- WP-17V-4m #50.0008

Model	Input Voltage	Effective Input Amps	KW	Rated Output at 40°C	No-load Volts	Dimension	Net weight	Protection Class
MAXIARC 160 LT 220±15%VAC 50/60Hz	Single phase	28	5	160A@60%	62	L:330mm(13in.) W:135mm(5.3in.) H:250mm(9.8in.)	4.9kg(10.8lb.)	IP23
MAXIARC 200 LT 220±15%VAC 50/60Hz	Single phase	36	6.8	200A@60%	61	L:375mm(14.8in.) W:135mm(5.3in.) H:250mm(9.8in.)	6.2kg(13.7lb.)	IP23

*Complete Professional Arc Select*CE **RoHS**