

## Welding Curtains

- Flame resistant
- UV resistant
- Waterproof
- Anti-mildew
- Slip resistant
- Scuff resistant
- Chemical resistant
- Color Fade resistant
- Phthalate free
- Airtight etc.
- EN ISO 25980 Approved
- 16mil (0.4mm) specially formulated vinyl




## SPECIFICATIONS

Model	ERP	Sizes(W*H)	Color	Unit
CPC-0001	00.3796	1.74*1.74m	Orange	Each
CPC-0002	32.0148.01	2.0*1.8m	Orange	Each
CPC-0003	32.0148.02	2.7*1.8m	Orange	Each
CPC-0013	32.0148.04	3.4*1.8m	Orange	Each
CPC-0004	00.3797	1.74*1.74m	Light Green	Each
CPC-0005	00.2708	1.74*1.74m	Red	Each
CPC-0006	00.2707	1.74*1.74m	Green	Each
CPC-0014	32.3770.07	1.3*1.8m	Green	Each
CPC-0015	32.3770.05	2.0*1.8m	Green	Each
CPC-0016	32.3770.04	2.7*1.8m	Green	Each
CPC-0017	32.3770.03	3.4*1.8m	Green	Each

## Welding Curtain Frame


- Suits 1.74\*1.74m welding curtain
- Durable black powder-coated round tube framing
- Snap-fit design for quick and easy assembly
- Lockable wheels for easy movement
- Welding curtain sold separately

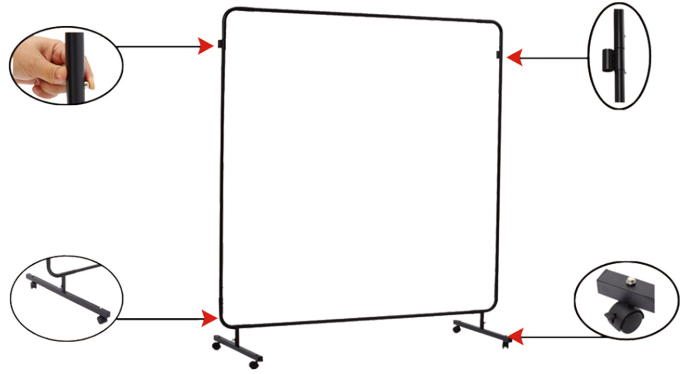

### SPECIFICATIONS

Model	ERP	Sizes(W*H)	Color	Unit
CPC-0007	00.3795	1.8*1.8m	Black	Each

### — ASSEMBLY INSTRUCTION

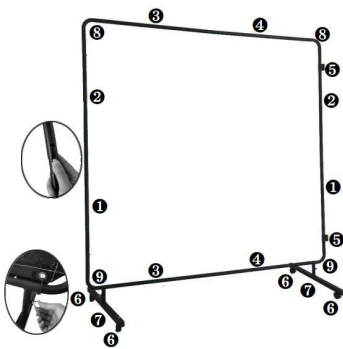

- 1 2. Side Poles \*2\*2.
- 3 4. Top & Bottom Poles \*2\*2.
5. Connectors \*2.
6. Wheels \*4 (2 Lockable).
7. Base Frames \*2.
8. Up Corners \*2.
9. Bottom Corners with screw \*2.

Step A: Attach one lockable wheel (6) and one plain wheel (6) to each base frame (7).

Step B: Insert the bottom corners with screw (9) to each base frame (7), tighten the screws.

Step C: Insert pole (2) to pole (1) to make long side poles, adding connector (5); Insert pole (4) to pole (3) to make long top & bottom poles.

Step D: Insert long bottom pole, long side poles to bottom corners (9).

Step E: Insert long top pole to up corners (8), connect to side poles, adjust the bottom corners' screws as preference, this completes the assembly of the frame.

Step F: Attach matching welding curtain (sold separately).

We provide red, green, orange, clear colors for choice.

## Welding Curtain and Frame Kit

- Flame resistant
- UV resistant
- Waterproof
- Anti-mildew
- Slip resistant
- Scuff resistant
- Chemical resistant
- Color Fade resistant
- Phthalate free
- Airtight etc.
- EN ISO 25980 Approved
- 16mil (0.4mm) specially formulated vinyl
- Snap-fit design for quick and easy assembly without tools



### SPECIFICATIONS

Model	ERP	Sizes(W*H)	Color	Unit
CPC-0009	32.0136.01	1.2*1.5m	Red	Kit

## Welding Curtain Bag

- Convenient, firm and durable
- Moisture and dustproof
- Comfortable handle design
- Transparent PVC Waterproof material
- Top zipper closure ensures safe and secure



### SPECIFICATIONS

Model	ERP	Sizes(W*H)	Color	Unit
CPC-0008	32.0149	38*43cm	Black	Each