




Complete Professional Arc Select

ARC 160/200 PFC



- Compact and portable with light weight
- Hot Start function for easier arc starting
- Arc force makes welding smoothly
- Digital ammeters for easy viewing
- Generator friendly allows to work with diesel generators and avoid failures due to its voltage spikes
- Protections including over-heat, over-voltage, low-voltage and over-current
- *90-275 Volts Input can be worked in Global market
- PFC technology makes power factor more than 0.99 and energy saving.

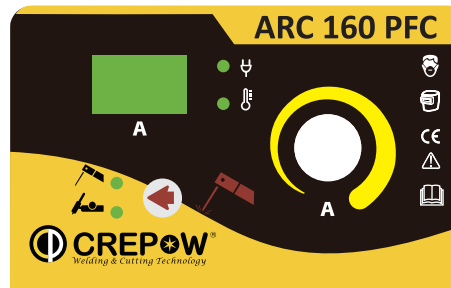

Global Voltage 

Processes

- STICK(SMAW)
- LIFT TIG

Optional Accessories

- Earth cable and clamp
- Welding cable and holder
- WP-17V-4m #50.0008
- 110V/220V Power adaptor #00.2598.01

Model	Input Voltage	Effective Input Amps	KW	Rated Output at 40°C	No-load Volts	Dimension	Net weight	Protection Class
ARC 160 PFC 90-275VAC 50/60Hz	Single phase	110V: 15 220V:14.5	110V:2.6 220V:5.1	110V:90A@40% 220V:160A@40%	66	L:405mm(16in.) W:135mm(5.3in.) H:250mm(9.8in.)	6kg(13.2lb.)	IP23
ARC 200 PFC 90-275VAC 50/60Hz	Single phase	110V: 20 220V:20	110V:3.4 220V:6.8	110V: 110A@40% 220V:200A@40%	66	L:405mm(16in.) W:135mm(5.3in.) H:250mm(9.8in.)	7kg(15.5lb.)	IP23